

# CONTROL TECHNIQUES



# COMMANDER

GENERAL PURPOSE, LOW VOLTAGE AC DRIVES

DRIVE OBSESSED

# THE 6TH GENERATION OF GENERAL PURPOSE DRIVE

## COMMANDER C

0.25 kW to 132 kW (0.33 HP to 200 HP)

**Control Techniques has set the standards in motor control since 1973.**

**Our new Commander C series is based on six generations of technical knowhow and expertise. It's flexible. It's versatile.**

It's up to whatever challenging application you want to throw at it. And thanks to its ground-breaking design, the new series is super quick and easy to set up too. To put it simply, it's the best performing, most reliable and energy efficient general purpose drive we've ever built.



### Free 5 year warranty\*

Our Commander C series is built to cope with harsh environments. In fact, it is so reliable we are confident enough to supply it with a free five-year warranty.

Now you can buy with the same confidence.

\*Warranty terms and conditions apply.



# FLEXIBLE MOTOR CONTROL KEY FEATURES

## Easy installation & commissioning

We've put the parameters you need on the front of the drive for easy reference.

## Exceptional starting torque

Up to 180% overload for high torque applications.

## Enhanced safety

We've added a Dual Safe Torque Off (STO) input feature to the Commander C300 model for extra protection.

## Integrated functional safety

The Dual Safe Torque Off (STO) feature, certified to SIL 3/PLe safety rating and compliant with EH/IEC 6/800-5-2, prevents the motor from moving unexpectedly and can also be used to implement emergency stop without contactors.

## Onboard PLC

Embedded intelligence eliminates the need for an external controller, saving both on cost and space when installing Commander C drives into a system.

## Super-quick start-up

Tap in 4 key parameters (the motor rated current, RPM, voltage and power factor) and off you go.

## Equipped with the latest energy saving features

The latest energy-saving technology means you get high productivity and low running costs.


## Communication with automated networks

Looking for a drive with total flexibility? Commander C drives interface with all types of controllers and networks.

## Worldwide drive centres and outstanding service

Need expert advice or support? Wherever you are in the world, we've got you covered.

Control Techniques  
Solutions for  
the Entertainment  
Industry

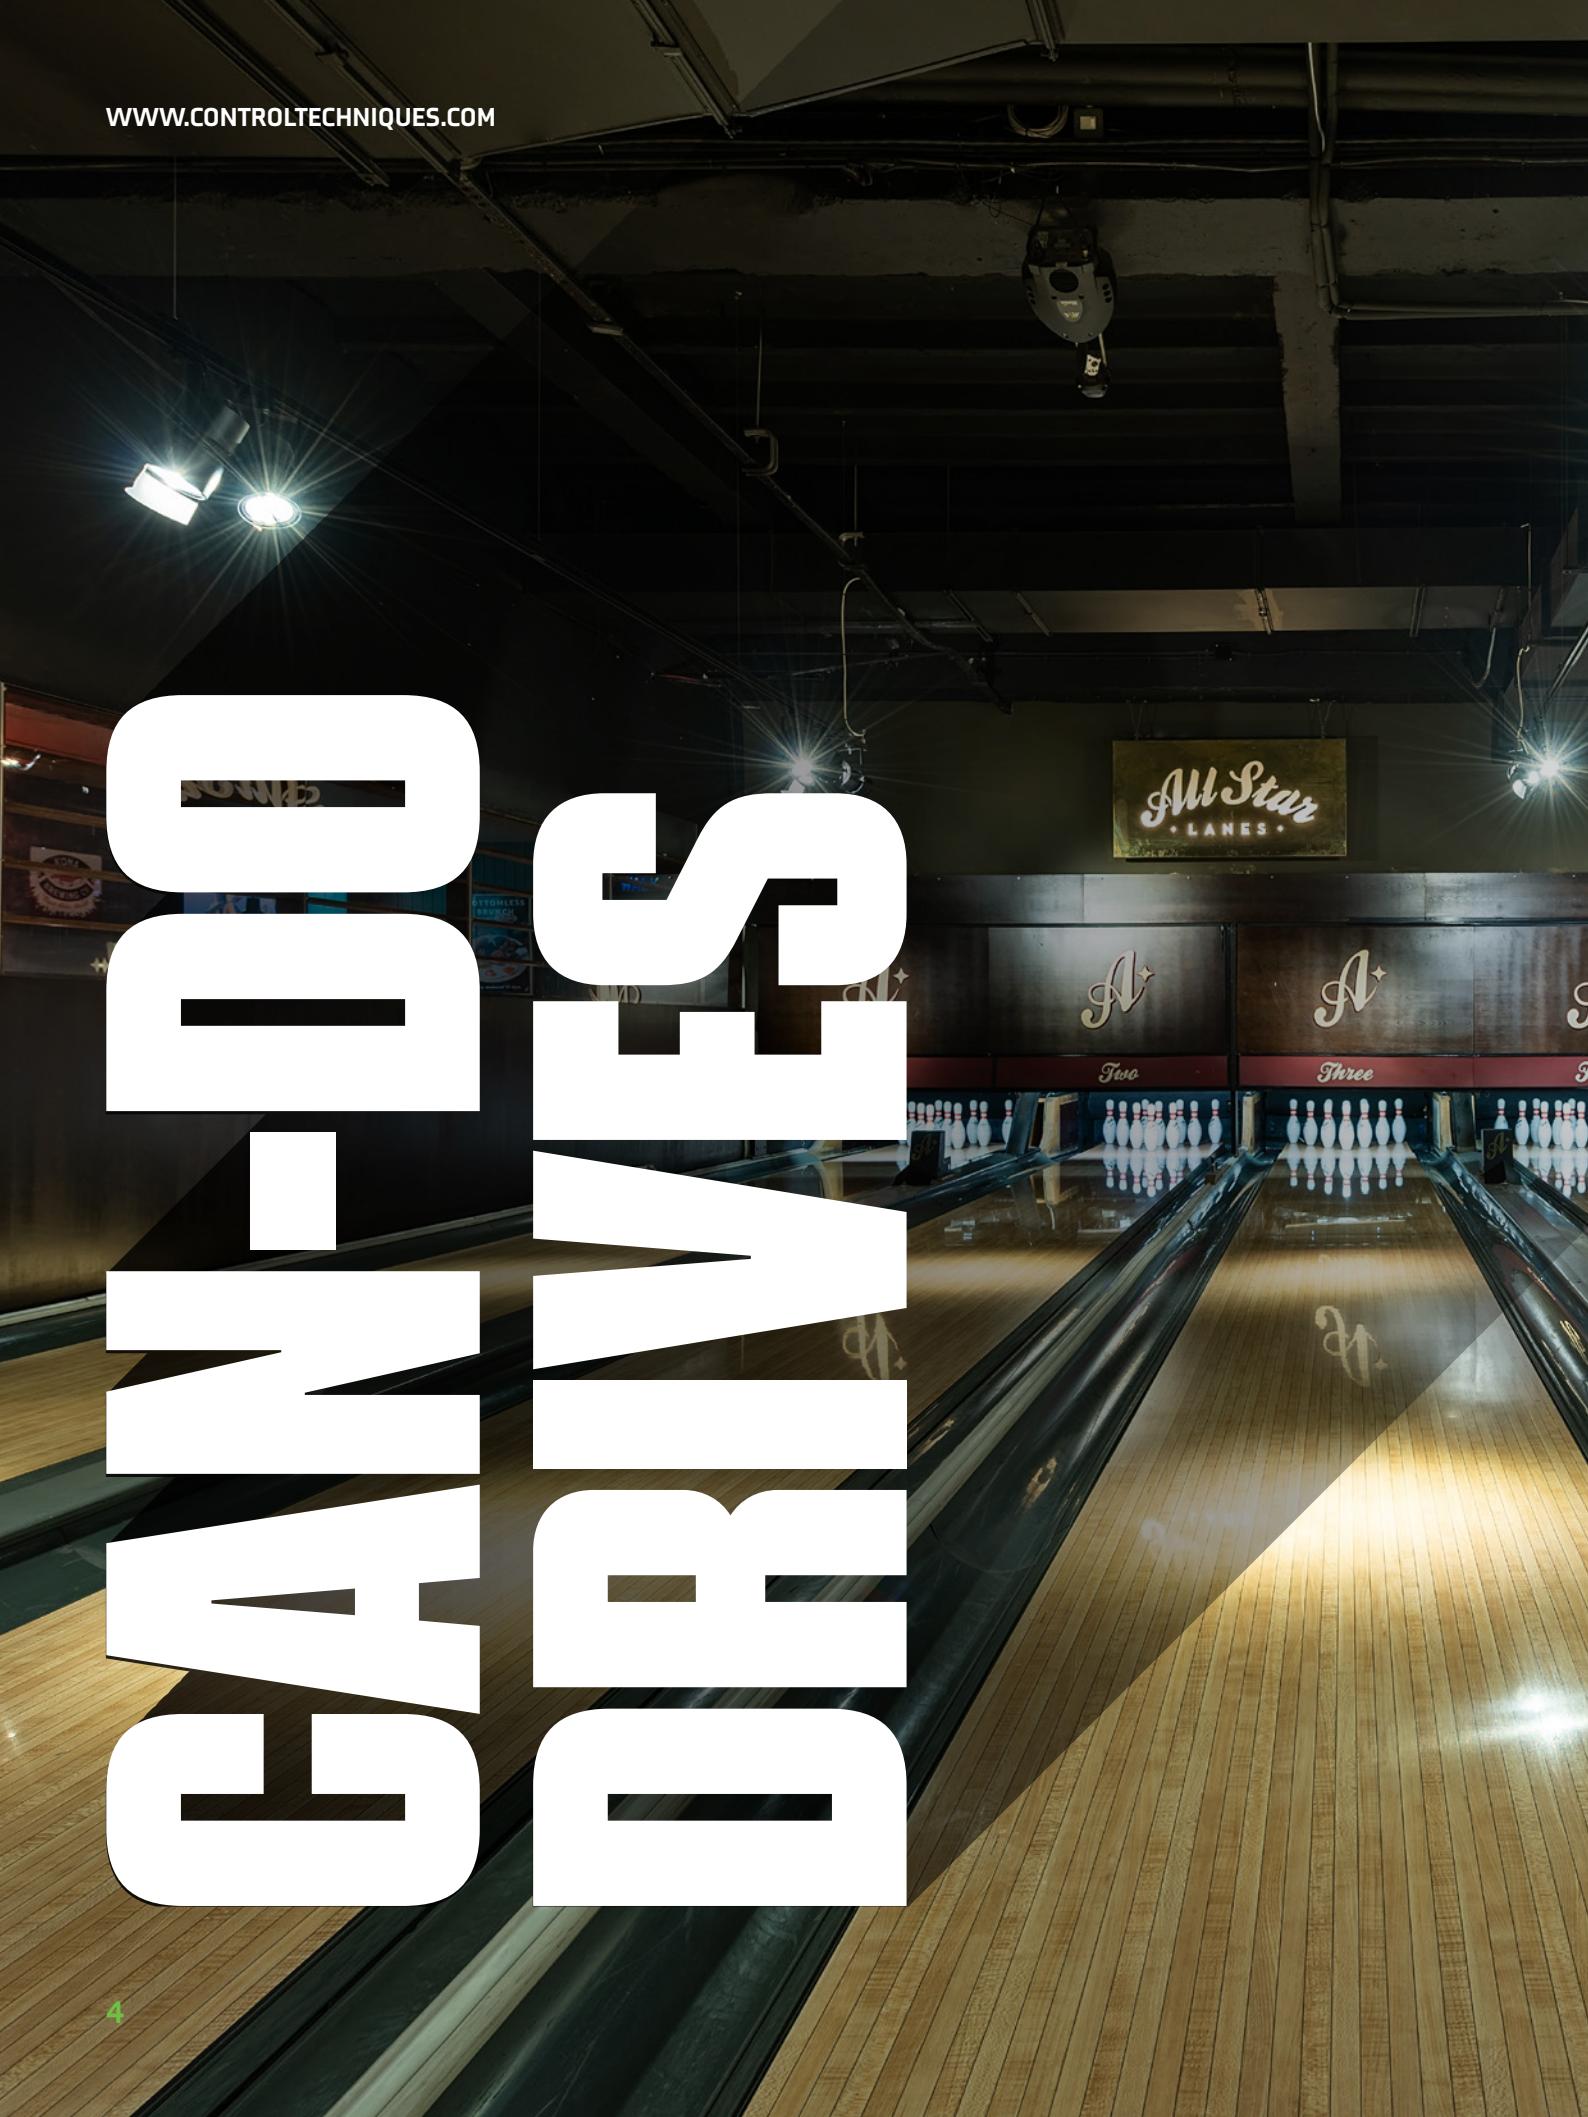

# CASE STUDY: BOWLING ALLEY IN BLOOMSBURY, LONDON

**Commander C200 stops noisy vibrations, improving the customer experience at a London Bowling Alley.**

**APS' client All Star Lanes in Bloomsbury London, experienced noisy vibrations from their ventilation system, disturbing diners in the restaurant.**

Being underground, the bowling alley needs to have a constant flow of fresh air. All Star Lanes had two objectives: bring clean air in from above and extract fumes from the kitchen.

**Commander drives, at the heart of general purpose applications worldwide**

#### Conveyors

- Accurate remote speed control with fieldbus communications
- S-ramp acceleration / deceleration profiling provides smooth speed transitions minimizing machine jerk
- Overload capacity up to 180% to add stability
- Avoids early wear and tear of the equipment

#### Access Control

- Smooth motion with enhanced open loop control
- Small physical size allows the drive to be mounted easily in smaller control cabinets
- Highly reliable in harsh environments, providing long lasting service

#### Lifts, Hoists, Winches

- Adjustable mechanical brake sequencing with torque proving function – no need for an external controller
- Embedded PLC functionality can manage local I/O reducing the need for an external controller

#### Process

(Mixers, Crushers, Agitators, Centrifuges, Extruders)

- Ease of integration to external PLC or other management systems through powerful networking options
- Conformal coating for enhanced environmental protection
- Overload capacity up to 180%
- Highly stable motor control

#### Pumps, Fans, Compressors

- Improved energy efficiency during periods of low demand
- On board PLC & PID functionalities make advanced control easy and efficient without the need of an external controller
- Skip Frequencies allow users to easily avoid equipment resonant frequencies, reducing high vibration levels
- Supply Loss Ride Through will keep the drive up and running through most power outages

# COMMANDER C

# FEATURES &

# ACCESSORIES

## Easy motor pairing and performance control

### V/Hz by default for easy set-up

- Multi-motor control
- 100% torque available to 1 Hz

### Slip compensation

- Square law V/F mode
- Dynamic V/F mode
- Auto tune (stationary and rotating)

## Simple setup and configuration



Fixed LED Keypad  
(as standard)



Operator Interface



Remote Keypad RTC



IP66 (NEMA 4)  
Remote Keypad (LCD)



RS485 Cable



AI-Back-up Adaptor  
(provides SD card usage for  
programming / cloning)



AI-Smart Adaptor  
(provides SD card (supplied) usage  
for programming / cloning)




AI-485 24 V Adaptor  
(As AI485 adaptor but  
including 24 V input)



## Flexible connectivity

The 'SI' Interface on Commander C enables integration with a wide range of industry standard fieldbuses to allow remote control and diagnostics across different networks. Additionally, the AI-485 Adaptor option permits connection to RS485 networks using Modbus RTU.

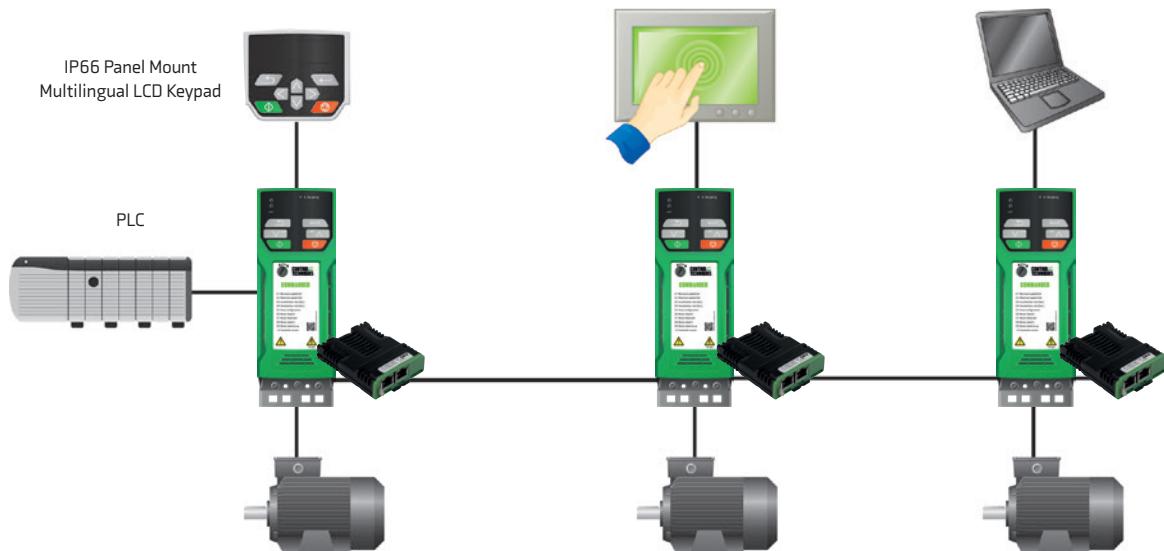

## Communication options



AI-485 Adaptor



SI-EtherCAT



SI-PROFINET



SI-DeviceNet



SI-PFOPBUS



SI-CANopen



SI-Ethernet

## Robust and reliable design

- PCBs conformal coated for resilience to harsh environments
- Patented air flow system cools and protects components
- Supply voltage tolerance for smooth operation during disturbances to supply
- Intelligent three speed user replaceable fan with failure detection
- Trip avoidance features take action instead of tripping out:
  - i. Load shedding reduces speed at current limits
  - ii. Supply loss ride-through keeps motor running during brown outs
- High overload capability: 180% for 3 seconds (RFC-A mode) or 150% for 60 seconds (Open loop mode)
- Ingress protection: IP20/NEMA 1 - UL Type 1 with conduit box

## Embedded intelligence reduces costs

- Onboard PLC
- Built-in independent PID control

## Energy saving

- Dynamic V/Hz - improves efficiency by reducing motor losses during low demand
- 98% efficient - only 2% of energy is lost during the conversion process
- Low power standby mode - drives can be idle for significant periods, saving energy
- Automatic 3-speed cooling fan - keeps energy usage & acoustics noise to a minimum by intelligently responding to load and the environment
- Square Law V/F mode - optimized for quadratic loads to reduce motor losses

## Input / Output

### Onboard as standard

- 3 x Analog I/O
- 5 x Digital I/O
- 1 x Relay
- 2 X STO (C300 only)



### SI-I/O

- 4 x Digital I/O
- 1 x Digital input
- 3 x Analog inputs (default) / Digital inputs
- 2 x Relays





## Intuitive commissioning software


For fast task based commissioning and easy maintenance **Connect** offers a familiar Windows™ interface and intuitive graphical tools to enhance data analysis.

The dynamic drive logic diagrams allow the visualisation and control of the drive in real time. The parameter browser enables viewing, editing and saving of parameters as well as importing parameter files from our legacy drives.

## Advanced machine control

For more advanced applications **Machine Control Studio** provides a flexible and intuitive environment for programming. This is possible thanks to the onboard PLC that increases the drives functionality at no extra cost.

Control Techniques also provides support for customers' own function block libraries, with on-line monitoring of program variables with user defined watch windows and help for on-line change of program, in line with current PLC practice.

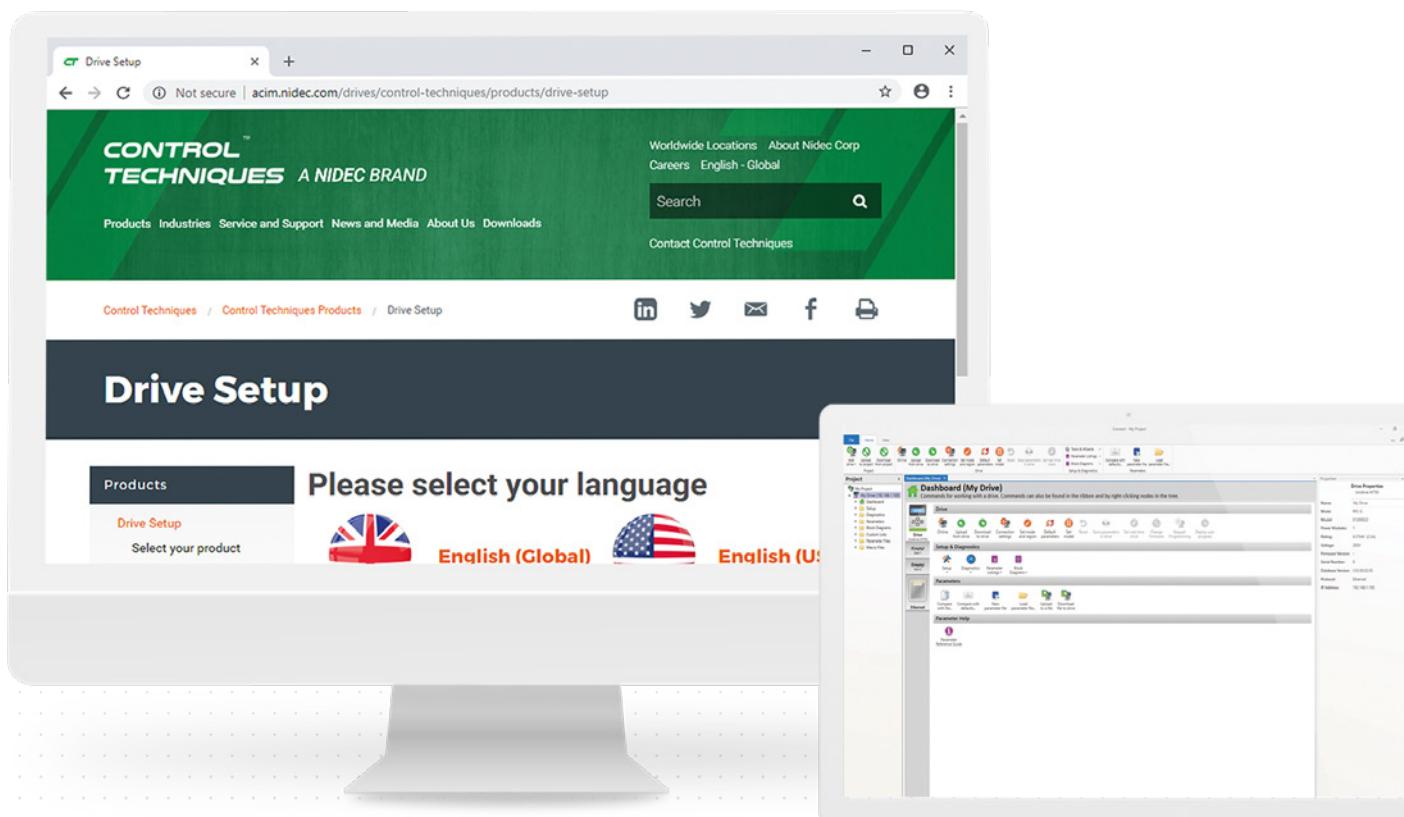

# VIRTUAL DEMO: COMMANDER C DRIVE SIMULATOR

**The Commander C Virtual Demo Tool provides a safe and accessible first experience with Commander C variable speed drives and allows you to get familiar with the Commander C keypad and menu structure.**

This digital replica of a Commander C drive, motor and control allows you to use the virtual keypad to set-up the drive parameters for commissioning just like in a real situation. Once the key parameters have been set, the drive can be enabled and the motor shaft will spin.

To see just how easy it is to set-up the drive, visit: [www.controltechniques.com/virtual-demo-tool](http://www.controltechniques.com/virtual-demo-tool)

**Diagnostics? There's an app for that**



## Diagnostic Tool

The Diagnostic Tool App is a fast and simple tool, which allows users to quickly solve any error codes that the drive may show.

Download from:

[controltechniques.com/mobile-applications](http://controltechniques.com/mobile-applications)

\*For Microsoft users, this mobile app operates with Windows 10 only.




**Free online help: [Drive-Setup.com](http://Drive-Setup.com)**


You'll have permanent free access to lots of web pages with useful information, like user manuals, 'how-to' videos and explainer guides.

## YouTube Training

Access a series of Commander training videos, available on YouTube, visit:

[www.youtube.com/controltechniques](http://www.youtube.com/controltechniques)

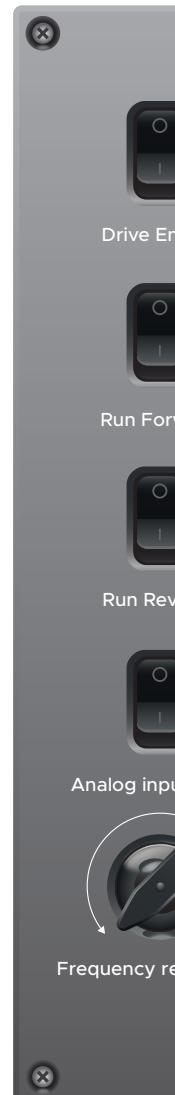

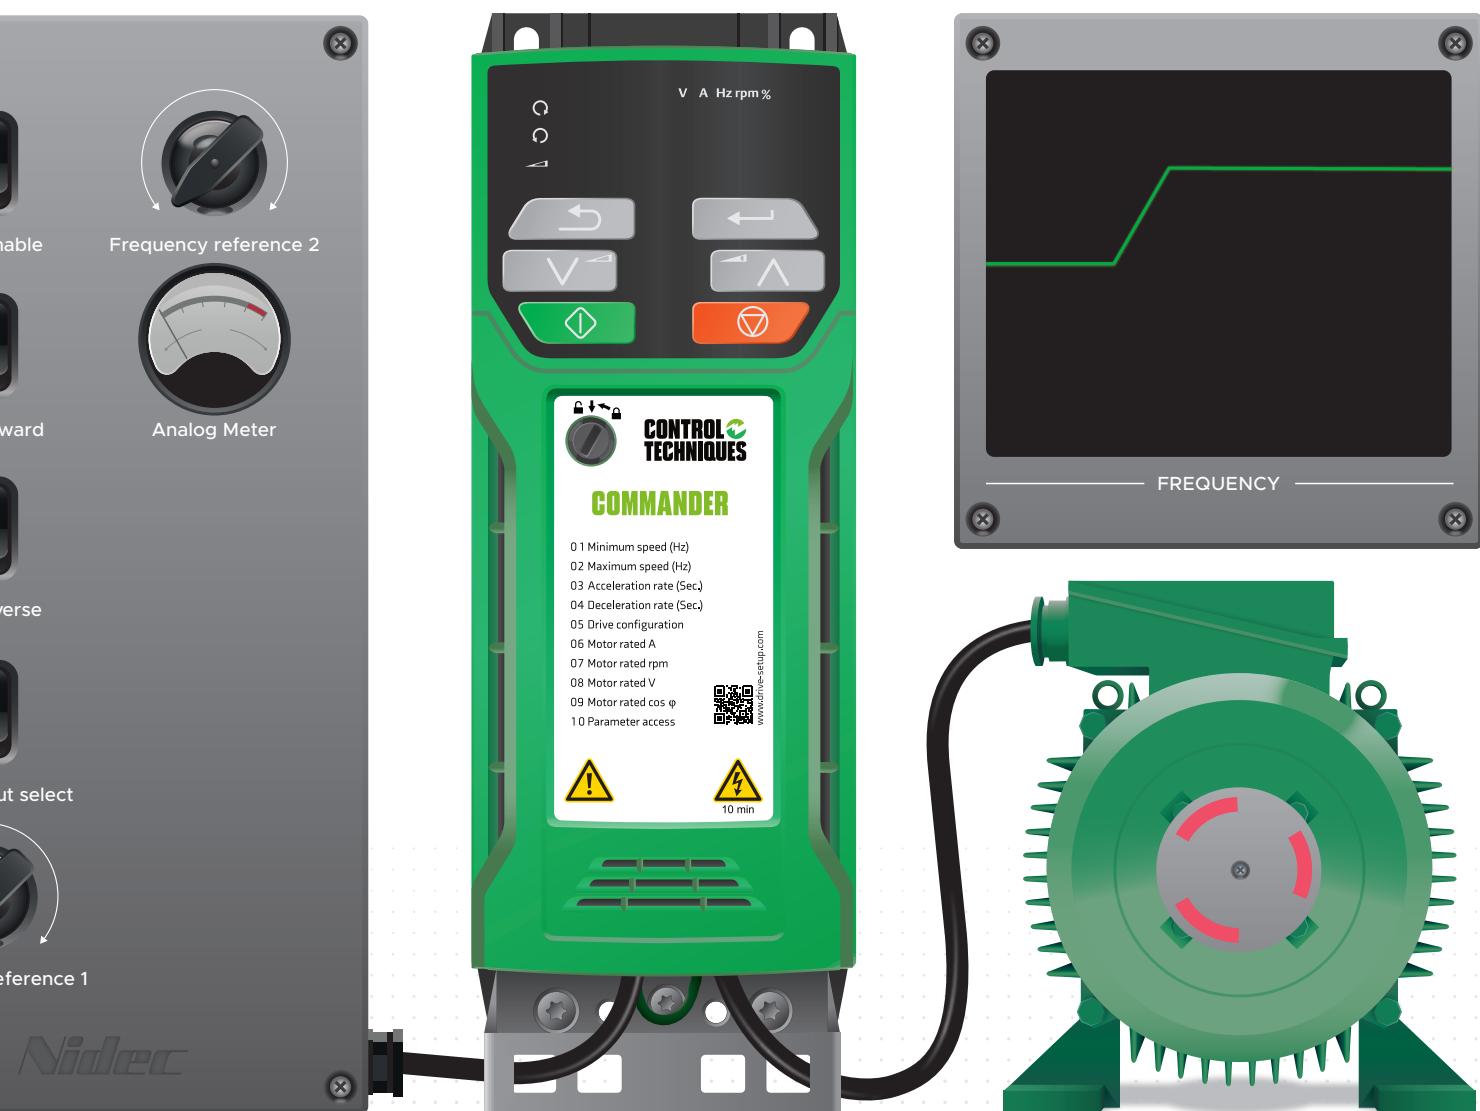

# COMMANDER C


# SPECIFICATIONS

Environment		AC Supply Requirements	
Ambient Operating Temperature	Size 1 - 4: -20°C to 40°C (-4°F to 104°F) @ 3 kHz switching freq.   Operation to 60°C (140°F) with de-rating Size 5 - 9: -20°C to 40°C (-4°F to 104°F) @ 3 kHz switching freq.   Operation to 55°C (131°F) with de-rating	Voltage	100 V models: 100 to 120 Vac ±10% 200 V models: 200 to 240 Vac ±10% 400 V models: 380 to 480 Vac ±10%
Cooling method	Forced convection	Phases	1Ø and 3Ø (Model dependent)
Humidity	95 % non-condensing at 40 °C (104 °F)	Maximum Supply Imbalance	2% negative phase sequence, 3% voltage imbalance between phases
Storage Temperature	Size 1 - 4: -40°C to 60°C (-40°F to 140°F) — 24 months Max. Size 5 - 9: -40°C to 55°C (-40°F to 131°F) — 24 months Max.	Input Frequency	45 to 66 Hz
Altitude	De-rate the continuous output current by 1% for every 100 m (328 ft) above 1000 m (3,280 ft) to a maximum of 3000 m (9,840 ft)	Input Displacement Power Factor	0.97
Vibration	Tested in accordance with IEC 60068-2-64 and IEC 60068-2-6	Switching Frequency	Size 1 - 4: 0.667, 1, 2, 3, 4, 6, 8 12 & 16 kHz Size 5 - 9: 2, 3, 4, 6, 8 12 & 16 kHz
Mechanical Shock	Tested in accordance with IEC 60068-2-27 and IEC 60068-2-29	Output Frequency Range	0 to 550 Hz
Enclosure Rating	IP20, NEMA 1 conduit kits available	Frequency Accuracy	±0.02% of full scale
Electromagnetic Capability	IEC/EN 61800-3 Immunity and Emissions EN 61000-6-2: Immunity for industrial environments EN 61000-6-4: Emissions for industrial environments EN 61000-3-2: Harmonic current emissions An EMC data sheet is available on request	Frequency Resolution	0.01 Hz
RoHS	Complies with the Restriction of Hazardous Substances Directive (2011/65/EU)	Analog Input Resolution	Voltage mode: 11 bits (unipolar) Current mode: 11 bits
		Braking	Dynamic braking transistor included, requires external resistor

Protection		Approval & Listings	
<b>DC Bus Undervoltage Trip</b>	100 V models: 175 Vdc 200 V models: 175 Vdc 400 V models: 330 Vdc	UL, cUL	UL file NMMS/8: E171230
<b>DC Bus Overvoltage Trip</b> Humidity	<b>Frame sizes 1 - 4:</b> 100 V models: 510 Vdc 200 V models: 510 Vdc 400V models: 870 Vdc  <b>Frame size 5 - 9:</b> 200V models: 415 Vdc 400 V models: 830 Vdc	CE	CE approval
<b>Drive Overload Trip</b>	Programmable: Default settings: 180% for 3s, 150% for 60s	EU	These products comply with the Restriction of Hazardous Substances Directive (2011/65/EU), the Low Voltage Directive (2014/35/EU) and the Electromagnetic Compatibility Directive, (2014/30/EU).
<b>Instantaneous Overcurrent Trip</b>	220% of rated motor current	RCM	RCM Registered supplier No. 12003815281
<b>Phase Loss Trip</b>	DC bus ripple threshold exceeded	ISO	Manufacturing facilities comply with ISO 9001:2015 and ISO 14001
<b>Over-temperature Trip</b>	Drive heatsink temperature exceeds 95°C (203°F)	C300 models only: The Safe Torque Off (STO) function may be used as a safety component of a machine.	
<b>Short Circuit Trip</b>	Protects against output phase-to-phase fault	Type examination certificates by TÜV Rheinland: Frame sizes 1 - 4: No. 01/205/5383.03/18 Frame sizes 5 - 9: No. 01/205/5387.02/18	
<b>Ground Fault Trip</b>	Protects against output phase-to-ground fault	Functional safety parameters: EN ISO 13849-1 - Cat 4, PLe EN61800-5-2/EN62061/IEC 61508 - SIL 3 UL functional safety approval: FSPC E171230	
<b>Motor Thermal Trip</b>	Electronically protects the motor from overheating due to loading conditions	EAC	RU C-GB.HA10.B.01062

# COMMANDER C

# TERMINAL DIAGRAM

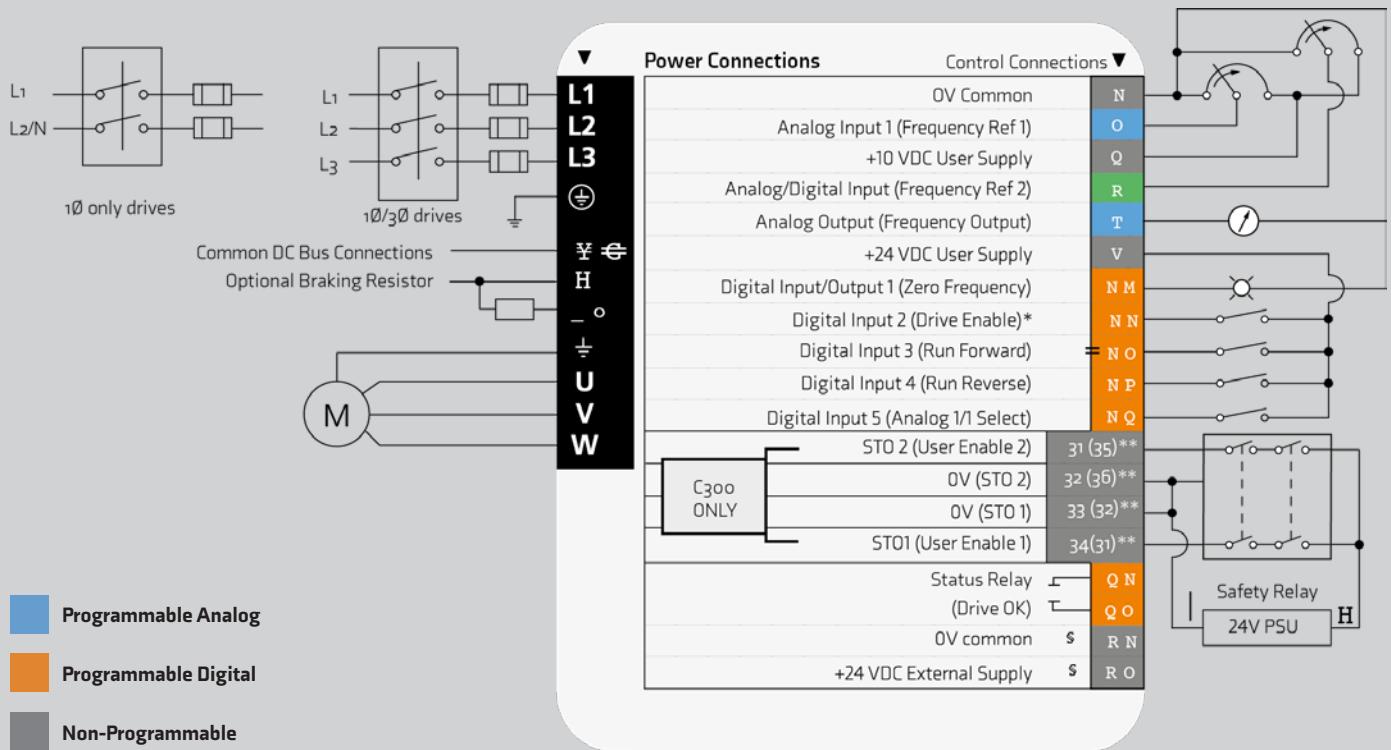

Pin#	Default Function	Type/Description	Notes
1	0V Common	Common for external analog signals	
2	Frequency reference 1	Single ended analog input 11 bit	0 to +10 Vdc, 0-20 mA or 4-20 mA or 20-4 mA or 20-0 mA
4	+10 Vdc user supply	Reference supply	5 mA Output current
5	Frequency reference 2	Single ended analog input 11 bit or digital input	0 to +10 Vdc or 0 to +24 Vdc
7	Output frequency	Single ended analog output	0 to +10 Vdc
9	+24 Vdc user supply	Digital I/O supply	100 mA
10	At zero frequency	Digital I/O 1	0 to +24 Vdc
11	Enable*	Digital input 2	0 to +24 Vdc
12	Run forward	Digital input 3	0 to +24 Vdc
13	Run reverse	Digital input 4	0 to +24 Vdc
14	Analog input 1/2 select	Digital input 5	0 to +24 Vdc
31(35)**	Safe Torque Off/Drive enable	STO 2	0 to +24 Vdc
32(36)**	0V STO 2	0V STO 2	0V common for STO 2
33(32)**	0V STO 1	0V STO 1	0V common for STO 1
34(31)**	Safe Torque Off/Drive enable	STO 1	0 to +24 Vdc
41	Status relay (drive OK)	Normally open contact	2 A, 240 Vac, 0.5 A, 30 Vdc inductive load
42			
51 †	0V common	Common for backup supply	
52 †	+24 Vdc external supply	Backup control supply	24 Vdc, 40 W

#### Notes

- \* C300 uses STO, so terminal 11 is unassigned
- \*\* Frames 1 to 4 (Frames 5 to 9) - different terminals by frame size
  - Frames 1 to 4 - the 0V terminals on the Safe Torque Off are isolated from each other and the 0V common
  - Frames 5 to 9 - the 0V terminals on the Safe Torque Off are not isolated from each other and the 0V common
- The Safe Torque Off / Drive enable terminal is a positive logic only input
- † Terminal 51 and 52 must be connected to an external 24 V power supply if backup is required (frame sizes 6-9 only)

# COMMANDER C

# ORDERING GUIDE

## How to select a drive

### Electrical Considerations

- What is the supply voltage?
- Single or three phase input power?
- What is the motor rating?
- Continuous current – FLA (Full Load Amps)
- Select the drive based on motor Amps rather than horsepower

## Key

Derivative  
**Cx00-**

Frame & Volts  
**03 4**

Choose Variant:  
C200 or C300

Frame Size:

Voltage Rating:  
1 = 100 V, 2 = 200 V, 4 = 400 V

Current  
**00073**

Drive format  
**A**

Current Rating (A):  
Heavy Duty Rating x 10

A - Internal Line Choke  
E - External Line Choke Required

### Drive Mechanical Mounting

- Panel mounting – as standard
- Wall mounting – UL conduit kits are available
- Through panel mounting – frames 5 and up

Frame size	Dimensions H x W x D mm (in)	Weight kg (lb)
1	160 x 75 x 130 (6.3 x 2.95 x 5.1)	0.75 (1.65)
2	205 x 75 x 150 (8.07 x 2.95 x 5.9)	1.3 (3.0)
3	226 x 90 x 160 (8.9 x 3.54 x 6.3)	1.5 (3.3)
4	277 x 115 x 175 (10.9 x 4.5 x 6.9)	3.13 (6.9)
5	391 x 143 x 200 (15.39 x 5.63 x 7.87)	7.4 (16.3)
6	391 x 210 x 227 (15.39 x 8.27 x 8.94)	14 (30.9)
7	557 x 270 x 280 (21.93 x 10.63 x 11.02)	28 (61.70)
8	804 x 310 x 290 (31.65 x 12.21 x 11.42)	52 (114.6)
9A	1069 x 310 x 290 (42.09 x 12.21 x 11.42)	46 (101.4)
9B	1108 x 310 x 290 (43.62 x 12.21 x 11.42)	66.5 (146.6)



# COMMANDER C

# PART NUMBERS

<b>C200</b>	<b>03</b>	<b>4</b>	<b>0073</b>	<b>A</b>	<b>10 1</b>	<b>00</b>	<b>AB 100</b>
Frame Size			Heavy Duty Current Rating x 10		CT Reserved		Product Variant
C200 - The lead product for the Commander range		1 = 100 V		A - Internal Line Choke		Default Setting	
C300 - As C200 + Dual STO		2 = 200 V		E - External Line Choke Required		00 - CT Default	
		4 = 400 V				01 - US Default	
		5 = 575 V					
		6 = 690 V					

## 100/200 VAC +/-10%

Product Code	Size	Input Phases	Heavy Duty			Normal Duty		
			Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
C200-01100017A10100AB100	01	1	1.7	0.25	0.33			
C200-01100024A10100AB100	01	1	2.4	0.25	0.5			
C200-02100042A10100AB100	02	1	4.2	0.75	1			
C200-02100056A10100AB100	02	1	5.6	1.1	1.5			

For Normal Duty applications,  
use Heavy Duty ratings.

## 200/240 VAC +/-10%

Product Code	Size	Input Phases	Heavy Duty			Normal Duty		
			Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
C200-01200024A10100AB100	1	1	2.4	0.37	0.5			
C200-01200033A10100AB100	1	1	3.3	0.55	0.75			
C200-01200042A10100AB100	1	1	4.2	0.75	1			
C200-02200024A10100AB100	2	1 3	2.4	0.37	0.5			
C200-02200033A10100AB100	2	1 3	3.3	0.55	0.75			
C200-02200042A10100AB100	2	1 3	4.2	0.75	1			
C200-02200056A10100AB100	2	1 3	5.6	1.1	1.5			
C200-02200075A10100AB100	2	1 3	7.5	1.5	2			
C200-03200100A10100AB100	3	1 3	10	2.2	3			
C200-04200133A10100AB100	4	1 3	13.3	3	3			
C200-04200176A10100AB100	4	3	17.6	4	5			
C200-05200250A10100AB100	5	3	25	5.5	7.5	30	7.5	10
C200-06200330A10100AB100	6	3	33	7.5	10	50	11	15
C200-06200440A10100AB100	6	3	44	11	15	58	15	20
C200-07200610A10100AB100	7	3	61	15	20	75	18.5	25
C200-07200750A10100AB100	7	3	75	18.5	25	94	22	30
C200-07200830A10100AB100	7	3	83	22	30	117	30	40
C200-08201160A10100AB100	8	3	116	30	40	149	37	50
C200-08201320A10100AB100	8	3	132	37	50	180	45	60
C200-09201760A10100AB100	9	3	176	45	60	216	55	75
C200-09202190A10100AB100	9	3	219	55	75	266	75	100
C200-09201760E10100AB100	9	3	176	45	60	216	55	75
C200-09202190E10100AB100	9	3	219	55	75	266	75	100
C200-02200056A10100AB100	2	1 3	5.6	1.1	1.5			
C200-02200075A10100AB100	2	1 3	7.5	1.5	2			
C200-03200100A10100AB100	3	1 3	10	2.2	3			
C200-04200133A10100AB100	4	1 3	13.3	3	3			
C200-04200176A10100AB100	4	3	17.6	4	5			
C200-05200250A10100AB100	5	3	25	5.5	7.5	30	7.5	10
C200-06200330A10100AB100	6	3	33	7.5	10	50	11	15
C200-06200440A10100AB100	6	3	44	11	15	58	15	20

For Normal Duty applications,  
use Heavy Duty ratings.For Normal Duty applications,  
use Heavy Duty ratings.

C200-07200610A10100AB100	7	3	61	15	20	75	18.5	25
C200-07200750A10100AB100	7	3	75	18.5	25	94	22	30
C200-07200830A10100AB100	7	3	83	22	30	117	30	40
C200-08201160A10100AB100	8	3	116	30	40	149	37	50
C200-08201320A10100AB100	8	3	132	37	50	180	45	60
C200-09201760A10100AB100	9	3	176	45	60	216	55	75
C200-09202190A10100AB100	9	3	219	55	75	266	75	100
C200-09201760E10100AB100	9	3	176	45	60	216	55	75
C200-09202190E10100AB100	9	3	219	55	75	266	75	100

### 380/480 VAC +/-10%

Product Code	Size	Input Phases	Heavy Duty			Normal Duty		
			Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
C200-02400018A10100AB100	2	3	1.8	0.55	0.75			
C200-02400023A10100AB100	2	3	2.3	0.75	1			
C200-02400032A10100AB100	2	3	3.2	1.1	1.5			
C200-02400041A10100AB100	2	3	4.1	1.5	2			
C200-03400056A10100AB100	3	3	5.6	2.2	3			
C200-03400073A10100AB100	3	3	7.3	3	3			
C200-03400094A10100AB100	3	3	9.4	4	5			
C200-04400135A10100AB100	4	3	13.5	5.5	7.5			
C200-04400170A10100AB100	4	3	17	7.5	10			
C200-05400270A10100AB100	5	3	27	11	20	30	15	20
C200-05400300A10100AB100	5	3	30	15	20	30	15	20
C200-06400350A10100AB100	6	3	35	15	25	38	18.5	25
C200-06400420A10100AB100	6	3	42	18.5	30	48	22	30
C200-06400470A10100AB100	6	3	47	22	30	63	30	40
C200-07400660A10100AB100	7	3	66	30	50	79	37	50
C200-07400770A10100AB100	7	3	77	37	60	94	45	60
C200-07401000A10100AB100	7	3	100	45	75	112	55	75
C200-08401340A10100AB100	8	3	134	55	100	155	75	100
C200-08401570A10100AB100	8	3	157	75	125	184	90	125

C200-09402000A10100AB100	9	3	200	90	150	221	110	150
C200-09402240A10100AB100	9	3	224	110	150	266	132	200
C200-09402000E10100AB100	9	3	200	90	150	221	110	150
C200-09402240E10100AB100	9	3	224	110	150	266	132	200

## 500/575 VAC +/-10%

Product Code	Size	Input Phases	Heavy Duty			Normal Duty		
			Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
C200-05500040A10100AB100	5	3	4	2.2	3	6.1	4	5
C200-05500069A10100AB100	5	3	6.9	4	5	10	5.5	7.5
C200-06500100A10100AB100	6	3	10	5.5	7.5	12	7.5	10
C200-06500150A10100AB100	6	3	15	7.5	10	17	11	15
C200-06500190A10100AB100	6	3	19	11	15	22	15	20
C200-06500230A10100AB100	6	3	23	15	20	27	18.5	25
C200-06500290A10100AB100	6	3	29	18.5	25	34	22	30
C200-06500350A10100AB100	6	3	35	22	30	43	30	40
C200-07500440A10100AB100	7	3	44	30	40	53	37	50
C200-07500550A10100AB100	7	3	55	37	50	73	45	60
C200-08500630A10100AB100	8	3	63	45	60	86	55	75
C200-08500860A10100AB100	8	3	86	55	75	108	75	100
C200-09501040A10100AB100	9	3	104	75	100	125	90	125
C200-09501310A10100AB100	9	3	131	90	125	150	110	150
C200-09501040E10100AB100	9	3	104	75	100	125	90	125
C200-09501310E10100AB100	9	3	131	90	125	150	110	150

## 500/690 VAC +/-10%

Product Code	Size	Input Phases	Heavy Duty			Normal Duty		
			Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
C200-07600240A10100AB100	7	3	24	18.5	25	30	22	30
C200-07600290A10100AB100	7	3	29	22	30	36	30	40
C200-07600380A10100AB100	7	3	38	30	40	46	37	50
C200-07600440A10100AB100	7	3	44	37	50	52	45	60

C200-07600540A10100AB100	7	3	54	45	60	73	55	75
C200-08600630A10100AB100	8	3	63	55	75	86	75	100
C200-08600860A10100AB100	8	3	86	75	100	108	90	125
C200-09601040A10100AB100	9	3	104	90	125	125	110	150
C200-09601310A10100AB100	9	3	131	110	150	150	132	175
C200-09601040E10100AB100	9	3	104	90	125	125	110	150
C200-09601310E10100AB100	9	3	131	110	150	150	132	175

## 100/120 Vac ±10%

Order Code	Supply Phases	Heavy Duty			Normal Duty		
		Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
Cx00-011 00017A	1	1.7	0.25	0.33			
Cx00-011 00024A	1	2.4	0.37	0.5			
Cx00-021 00042A	1	4.2	0.75	1			
Cx00-021 00056A	1	5.6	1.1	1.5			

## 200/240 Vac ±10%


Order Code	Supply Phases	Heavy Duty			Normal Duty		
		Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
Cx00-012 00017A	1	1.7	0.25	0.33			
Cx00-012 00024A	1	2.4	0.37	0.5			
Cx00-012 00033A	1	3.3	0.55	0.75			
Cx00-012 00042A	1	4.2	0.75	1			
Cx00-022 00024A	01-Mar	2.4	0.37	0.5			
Cx00-022 00033A	01-Mar	3.3	0.55	0.75			
Cx00-022 00042A	01-Mar	4.2	0.75	1			
Cx00-022 00056A	01-Mar	5.6	1.1	1.5			
Cx00-022 00075A	01-Mar	7.5	1.5	2			
Cx00-032 00100A	01-Mar	10	2.2	3			
Cx00-042 00133A	01-Mar	13.3	3	3			
Cx00-042 00176A	3	17.6	4	5			
Cx00-052 00250A	3	25	5.5	7.5	30	7.5	10

Cx00-062 00330A	3	33	7.5	10	50	11	15
Cx00-062 00440A	3	44	11	15	58	15	20
Cx00-072 00610A	3	61	15	20	75	18.5	25
Cx00-072 00750A	3	75	18.5	25	94	22	30
Cx00-072 00830A	3	83	22	30	117	30	40
Cx00-082 01160A	3	116	30	40	149	37	50
Cx00-082 01320A	3	132	37	50	180	45	60
Cx00-092 01760A	3	176	45	60	216	55	75
Cx00-092 02190A	3	219	55	75	266	75	100
Cx00-092 01760E	3	176	45	60	216	55	75
Cx00-092 02190E	3	219	55	75	266	75	100

## 380/480 Vac ±10%

Order Code	Supply Phases	Heavy Duty			Normal Duty		
		Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)	Max Cont. Current (A)	Motor Power (kW)	Motor Power (HP)
Cx00-024 00013A	3	1.3	0.37	0.5			
Cx00-024 00018A	3	1.8	0.55	0.75			
Cx00-024 00023A	3	2.3	0.75	1			
Cx00-024 00032A	3	3.2	1.1	1.5			
Cx00-024 00041A	3	4.1	1.5	2			
Cx00-034 00056A	3	5.6	2.2	3			
Cx00-034 00073A	3	7.3	3	3			
Cx00-034 00094A	3	9.4	4	5			
Cx00-044 00135A	3	13.5	5.5	7.5			
Cx00-044 00170A	3	17	7.5	10			
Cx00-054 00270A	3	27	11	20	30	15	20
Cx00-054 00300A	3	30	15	20	31	15	20
Cx00-06400350A	3	35	15	25	38	18.5	25
Cx00-064 00420A	3	42	18.5	30	48	22	30
Cx00-064 00470A	3	47	22	30	63	30	50
Cx00-074 00660A	3	66	30	50	79	37	60
Cx00-074 00770A	3	77	37	60	94	45	75

For Normal Duty applications,  
use Heavy Duty ratings.

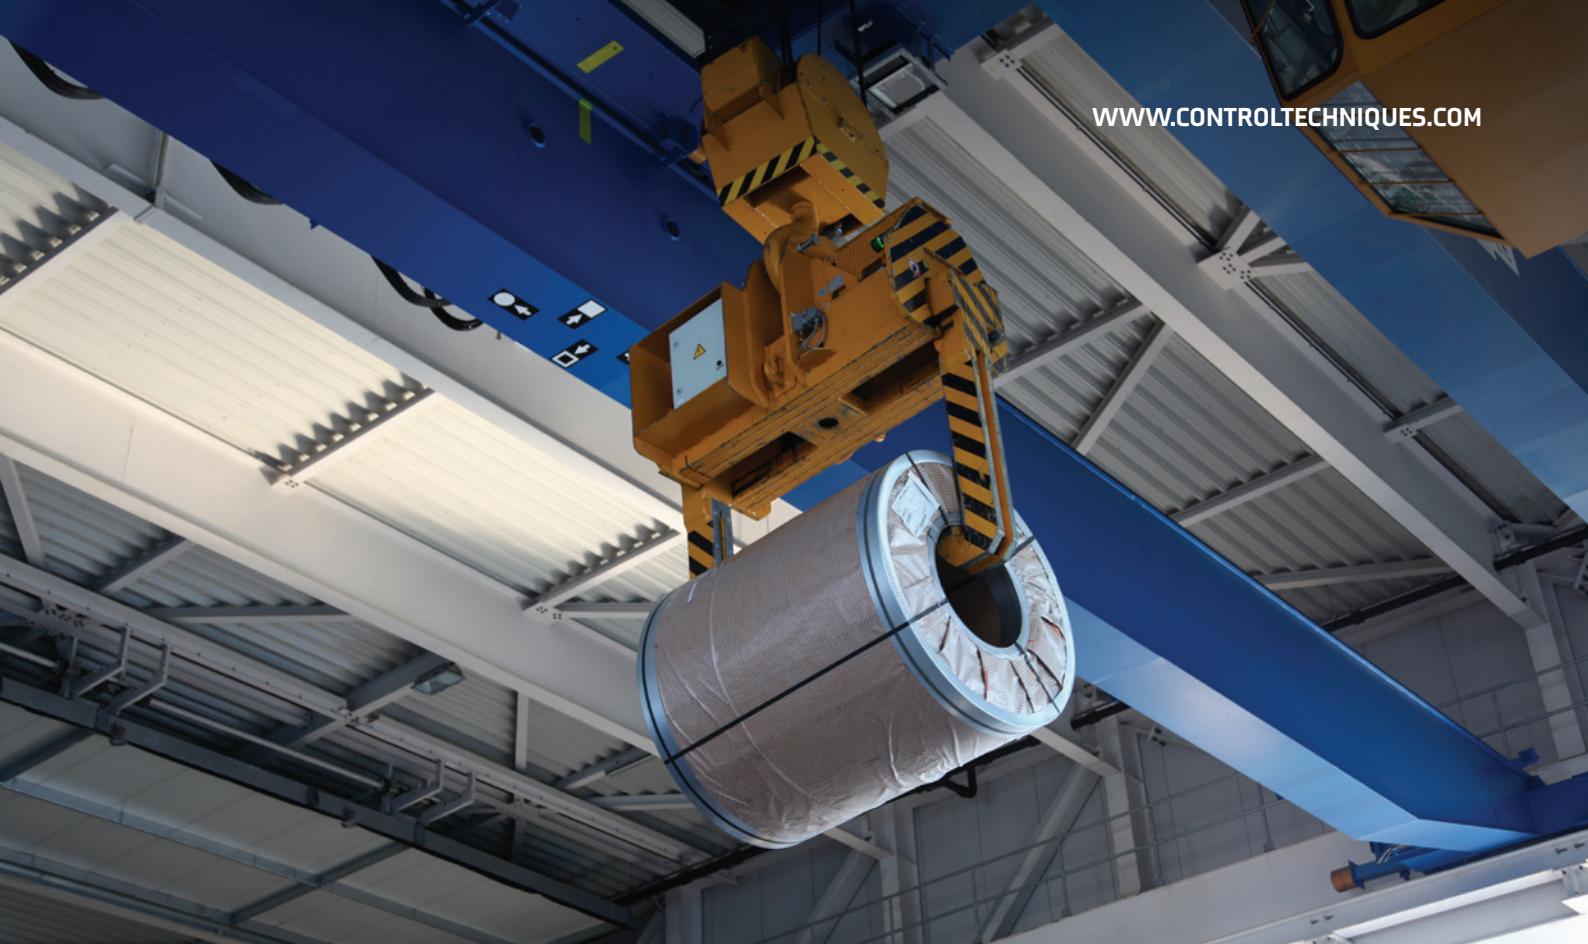

Cx00-074 01000A	3	100	45	75	112	55	75
Cx00-084 01340A	3	134	55	100	155	75	100
Cx00-084 01570A	3	157	75	125	184	90	125
Cx00-094 02000A	3	200	90	150	221	110	150
Cx00-094 02240A	3	224	110	150	266	132	200
Cx00-094 02000E	3	200	90	150	221	110	150
Cx00-094 02240E	3	224	110	150	266	132	200

# ACCESSORIES

# ORDERING GUIDE

Optional keypad	Order code	SI option modules (available from frame size 2 and upwards)	Order code
Remote Keypad	 82500000000001	SI-EtherCAT	 8240000018000
Remote keypad RTC	 82400000019600	SI-PROFIBUS	 8240000017500
<b>Optional accessories</b>			
AI-Back-up Adaptor	 82500000000004	SI-Ethernet	 8240000017900
AI-485 Adaptor	 82500000000003	SI-DeviceNet	 8240000017700
AI-Smart Adaptor	 82500000018500	SI-CANopen	 8240000017600
RS485 cable	 4500-0096	SI-PROFINET	 8250000018200
AI-485 24 V Adaptor	 82500000019700	SI-I/O	 8240000017800

**Through hole IP65 kit\***

Frame Size	Order Code
5	3470-0067
6	3470-0055
7	3470-0079
8	3470-0083
9A	3470-0119
9E	3470-0105

**Finger-guard grommet**

Frame Size	Order Code
9A / 9E	3470-0107

**Line reactor**

Frame Size	Order Code
9E (400 V)	7022-0063

**Lifting tool**

Frame Size	Order Code
9A	7778-0045
9E	7778-0016

**Fan replacement kit**

Frame Size	Order Code
1	3470-0092
2	3470-0095
3	3470-0099
4	3470-0103

\*IP65 / UL TYPE 12 rating is achieved on the rear of the drive when through panel mounted using the following kits.

\*\*These mounting brackets ensure the drive can be mounted on existing Commander SK installations.

\* Commander C built-in EMC filter complies with EN/IEC 61800-3. External EMC filters are required for compliance with EN/IEC 61000-6-4 as per the table below.

**UL Type 1 Conduit kit**

Frame Size	Order Code
1	3470-0091
2	3470-0094
3	3470-0098
4	3470-0102
5	3470-0069
6	3470-0059
7	3470-0080
8 / 9A	3470-0088
9E	3470-0115

**Optional external EMC filters\*\*\***

Frame Size	Voltage	Phases	Type	Order code
1	All	1	Standard	4200-1000
1	All	1	Low leakage	4200-1001
	100V	1	Standard	4200-2000
	1	Standard	4200-2001	
	200V	1	Low leakage	4200-2002
2		3	Standard	4200-2003
		3	Low leakage	4200-2004
	400V	3	Standard	4200-2005
	3	Low leakage	4200-2006	
		1	Standard	4200-3000
		1	Low leakage	4200-3001
3		3	Standard	4200-3004
		3	Low leakage	4200-3005
	400V	3	Standard	4200-3008
	3	Low leakage	4200-3009	
		1	Standard	4200-4000
		1	Low leakage	4200-4001
4		3	Standard	4200-4002
		3	Low leakage	4200-4003
	400V	3	Standard	4200-4004
	3	Low leakage	4200-4005	
5	200V	3	Standard	4200-0312
	400V	3	Standard	4200-0402
6	200V	3	Standard	4200-2300
	400V	3	Standard	4200-4800
7	200V & 400V	3	Standard	4200-1132
8	200V & 400V	3	Standard	4200-1972
9	200V & 400V	3	Standard	4200-3021

# THINK DRIVES, THINK CONTROL TECHNIQUES.

**1K+**

OEM Customers

**5M+**

Installed Drives

**1.4K+**

Employees

**70**

Countries



# CONTROL TECHNIQUES

# THE GLOBAL DRIVE

# SPECIALISTS SINCE 1973

**Control Techniques has been designing and manufacturing the best variable speed drives in the world since 1973.**

**Our customers reward our commitment to building drives that outperform the market. They trust us to deliver on time every time with our trademark outstanding service.**

More than 45 years later, we're still in pursuit of the best motor control, reliability and energy efficiency you can build into a drive. That's what we promise to deliver, today and always.



## Outstanding Performance

Applying our more than 45 years' engineering experience to everything we do means we outstrip the competition time and again.



## Total Flexibility

Our drives are built with open design architecture. They integrate with all primary communication protocols providing all the flexibility you could want.



## Global Reach, Local Support

Our dedicated Application Engineers in 70 countries are obsessed with ever-better drive design and technology. **That's what gives us the edge.**



## Tried and Trusted

Millions of people around the world trust us knowing we're committed to unrivalled design and top build quality.



## Embedded Intelligence

Combining precision motor control with the highest embedded intelligence means ultimate productivity and efficiency for your machinery.



## CONTROL TECHNIQUES IS YOUR GLOBAL DRIVES SPECIALIST.

With operations in over 70 countries, we're open for business wherever you are in the world.

For more information, or to find your local drive centre representatives, visit:

[www.controltechniques.com](http://www.controltechniques.com)

Connect with us



©2020 Nidec Control Techniques Limited. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec Control Techniques Ltd have an ongoing process of development and reserve the right to change the specification of their products without notice.

Nidec Control Techniques Limited. Registered Office: The Gro, Newtown, Powys SY16 3BE.

Registered in England and Wales. Company Reg. No. 01236886.

P.N.0778-0509-04 04/20

